


PRODUCT DATASHEET

ISOPRO - NEO

ISOPRO -NEO is a neoprene based sheet sealing material.

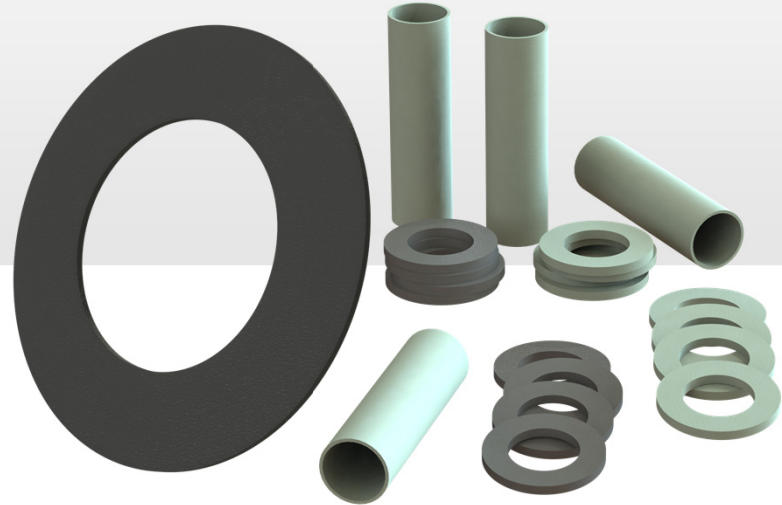

Service:

Suitable for use in applications involving hot and cold water, steam, oils, fuels, gases and a wide range of general chemicals.

Recommended Temperature Range:

-20°F (-29°C) to 170°F (77°C)

Gasket Factors:

| | |
|---|------|
| M | 0.50 |
| Y | 100 |

Typical Physical Properties:

| Properties | Test Standard | Typical Value | Unit |
|---------------------|---------------|---------------|------|
| Shore A Hardness | ASTM D2240 | 60 | |
| Tensile Strength | ASTM D412 | 900 | psi |
| Ultimate Elongation | ASTM D412 | 300 | % |
| Color | | Black | |

This data sheet refers to the material as supplied. The information contained herein is given in good faith, but no liability will be accepted by the Company in relation to same.

We reserve the right to change the details given on this data sheet as additional information is acquired. Customers requiring the latest version of this data sheet should contact our Applications Engineering Department.

The information given and, in particular, any parameters, should be used for guidance purposes only. The company does not give any warranty that the product will be suitable for the use intended by the customer.